

Portable Pump-Suction Gas Detector


At Safewill, we always put your safety first

Safewill ES20B is the smart, simple, economical way to compliance. Workers feel safe and incidents are minimized so everyone will be able to do more. That means savings realized from business continuity and productivity. The most user-friendly, reliable and cost-effective way to ensure safety, compliance and productivity.

- Minimize costs and training with five-button operation
- Pump-priming sampling technology can obtain accurate sampling results
- Compact, comfortable, portable, be sturdy and durable

ES20B Product Description

ES20B is a self-developed portable pumping gas detector, aluminum alloy shell, excellent performance and various indicators, using original imported sensors and low-power ARM processor; independent high-precision imported ADC analog-to-digital conversion chip, unique signal processing algorithm, accurate and stable measurement results; 2.5-inch LCD dot matrix display, readings are intuitive and generous;

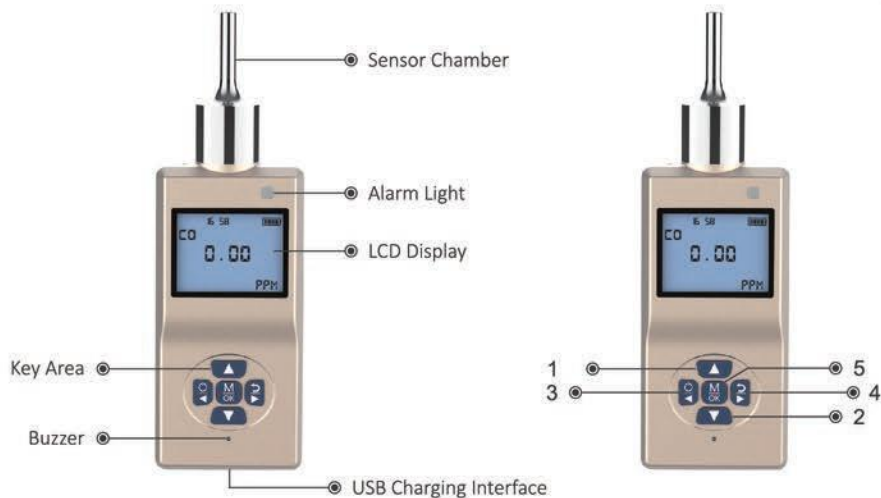


- 1 **【Up】**
Up Key
- 2 **【Down】**
Down Key
- 3 **【Left】**
Switch Machine And Shift Key
- 4 **【Right】**
Return Key/Unit Conversion
- 5 **【M/OK】**
Menu/Confirm Setting

FEATURES & BENEFITS

- Built-in high-performance pump, flow stability, can open may be shut
- Built-in storage, can store 100,000 sets of data
- Restore factory settings to prevent misoperation.
- Automated self-test of battery, sensor and electronics
- 2600mAh large capacity lithium battery, continuous work time more than 20 hours
- %VOL, %LEL, mg/m³, ppm, pph, ppb Various units are available
- Chinese and English are supported as standard, and other languages can be customized.
- Compact, lightweight design with five-button operation
- Intelligent algorithm, multi-point calibration and temperature compensation, more accurate measurement results
- Acousto-optic alarm, timely alarm when the concentration exceeds the standard is detected
- Affordable, with low cost of ownership

Safewill ES20B Technical Specification

TECHNICAL SPECIFICATIONS	
SIZE	200.5x64.8x35.5mm (LxWxH)
WEIGHT	16.23oz/460g
TEMPERATURE RANGE	-20 to 50 °C (special requirements need to be customized)
HUMIDITY RANGE	10-95%RH(no condensation)
PRESSURE RANGE	86-106 Kpa
SELF-TEST	Audible/Visual alarms on activation,Sensors, Battery,Circuitry
ALARMS AND TYPE	Visual,Vibrating,Audible;Low,High,TWA, STEL,OL(over limit),Low Battery
DETECTION MODE	Pump suction type
DETECTION PRINCIPLE	Catalytic combustion, infrared detection, electrochemistry, photoionization, PID, thermal conductivity
BATTERY CAPACITY	2600mAh Large capacity lithium battery
ACCURACY	≤±3%F.S
RESPONSE TIME	T90<30S
WORKING HOURS	> 12 hours (at room temperature, no alarm)
CHARGING TIME	≤6 hours
CERTIFICATIONSAND APPROVALS	CE FC SIL RoHS ATEX:  II 2G Ex ib IIB T3 Gb Tamb: -20 to 50°C Support customization
WARRANTY	One year warranty

SENSOR SPECIFICATIONS		
GASES	STANDARD MEASURING RANGE	RESOLUTION
Carbon Monoxide(CO)	0-100/500ppm	1ppm
Hydrogen Sulfide(H2S)	0-100/1000ppm	1ppm
Ammonia(NH3)	0-20/100/1000ppm	0.1/1ppm
Ozone(O3)	0-1/10/100ppm	0.1/1ppm
Oxygen(O2)	0-30%VOL	1%VOL
Sulfur Dioxide(SO2)	0-20/2000ppm	1ppm
Methane(CH4)	0-100%VOL	1%VOL
Formaldehyde(CH2O)	0-10/50ppm	1ppm
Nitric Oxide(NO)	0-250/2000ppm	1ppm
Nitrogen Dioxide(NO2)	0-20/2000ppm	1ppm
Hydrogen Chloride(HCL)	0-50/200ppm	1ppm
Hydrogen(H2)	0-1000/40000ppm	1ppm
Chlorine Dioxide(CLO2)	0-1/50ppm	0.1/1ppm

* The above gas selection table is only a partial display, if you need a detailed gas selection table, please contact us.

* Alarm setpoints for all sensors are user adjustable. Setpoint are automatically displayed during instrument start-up.

Product use environment:
 Can be applied to various dangerous industrial places; Products are widely used in metallurgy, petroleum and petrochemical, municipal, chemical, bio-pharmaceutical, home environmental protection, school laboratories, animal husbandry and other fields.

APPLICATION SCENARIOS



Petrochemical Industry



Biopharmaceutical



Animal Husbandry



Metallurgical

CUSTOMER USAGE DIAGRAM

